

Dielectric Insulation

Fiberglass crossarms ensure lines are electrically isolated

Foam Fill

Filled with closed-cell polyurethane foam to prevent wildlife infestation



Endcap

Interference fit endcap interlocks with foam fill to ensure a precise and secure fit

Rigidity

Lower deflection than the competition at the same loads

UV Protection

Layered UV protection from embedded additives and a UV veil

Fire Resistant *


* Optional fire-resistant additive for special use cases

Crush Bushing

Internal bushings allow proper bolt torque while maintaining the composite structure

Next Level Bending Stress

Harden your network with the next generation of engineered materials

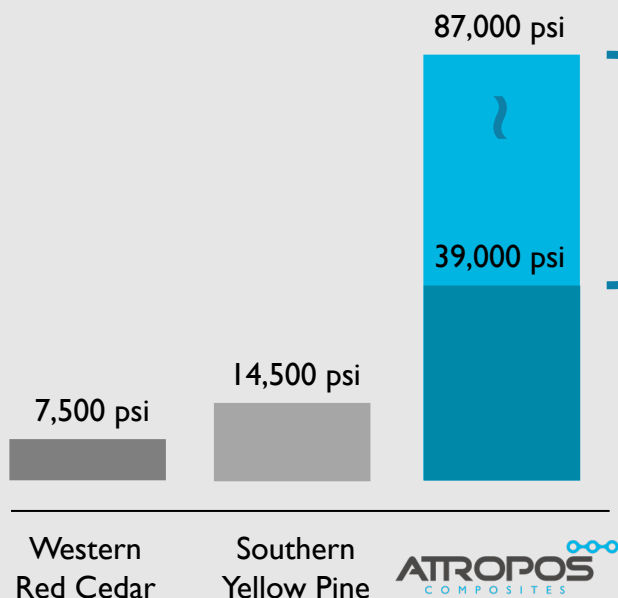

Any Load | Any Deflection

Our product offering covers a wide range of applications ensuring that your needs are met

3400 Series

3.625" X 4.625" outer dimensions

- 3401 – Light Duty
- 3402 – Standard Duty
- 3403 – Heavy Duty

4600 Series

4" X 6" outer dimensions

- 4602 – Standard Duty
- 4603 – Heavy Duty