

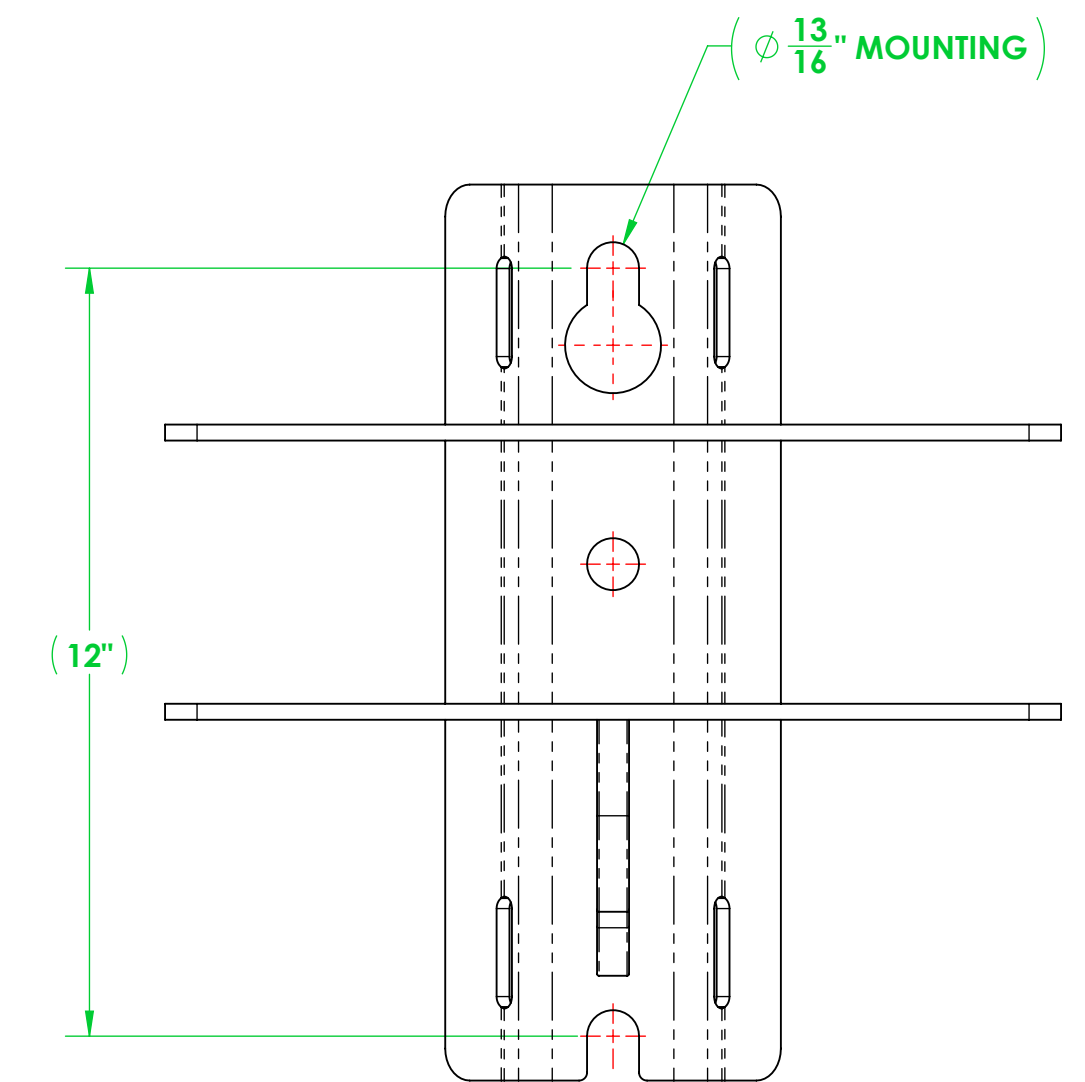
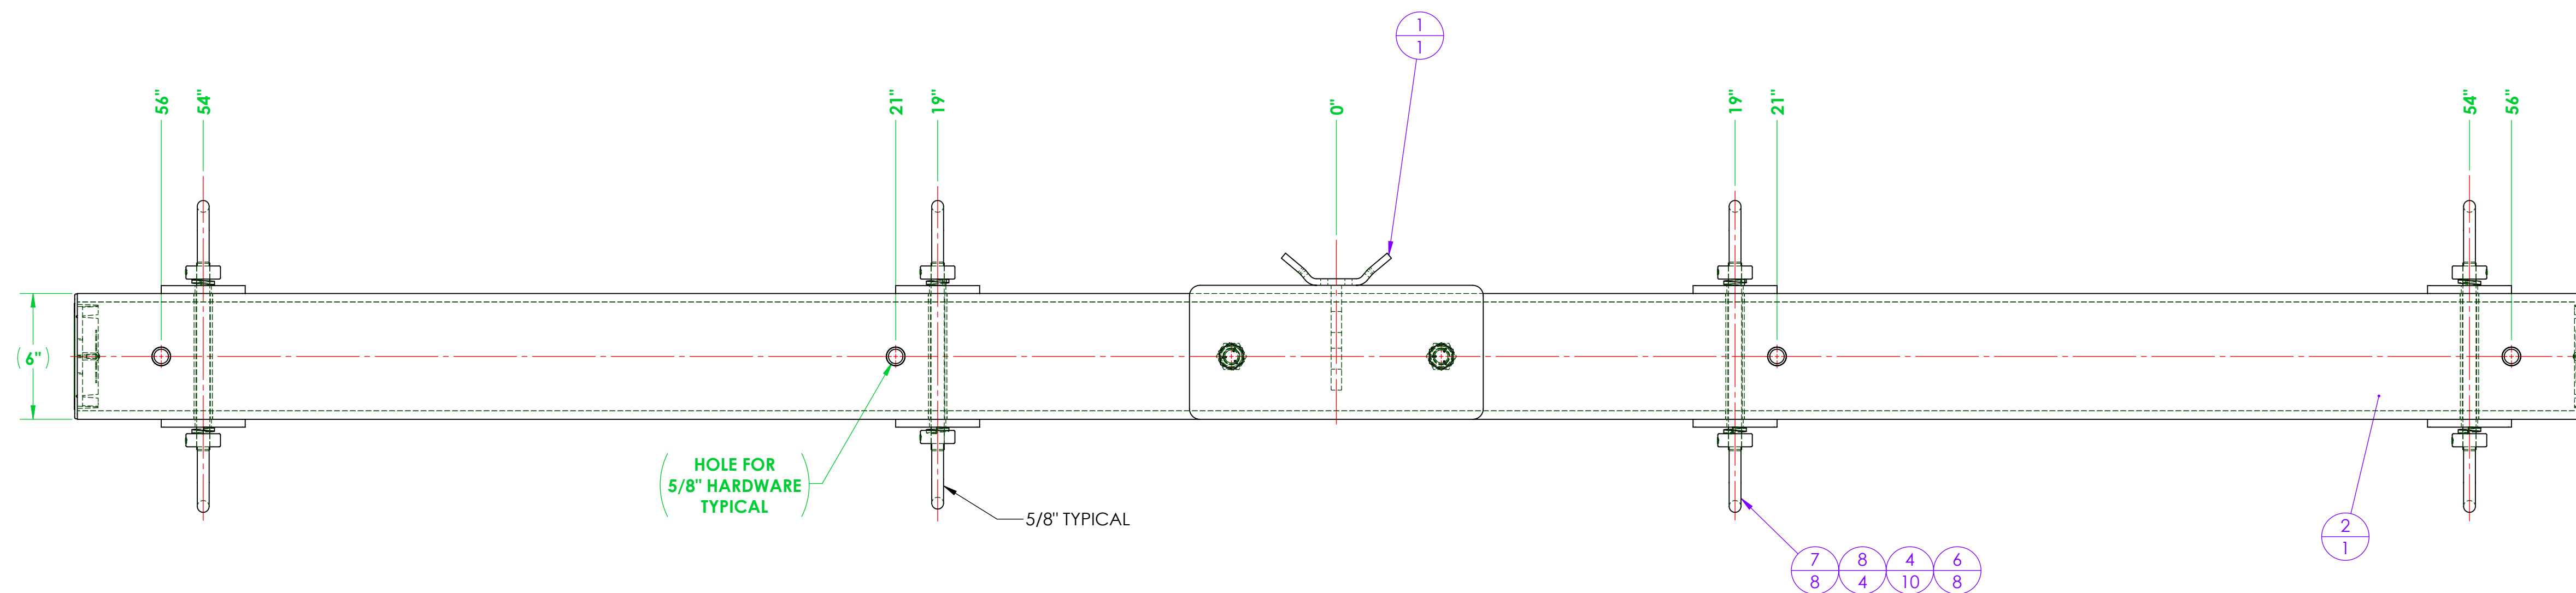


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
-		-	

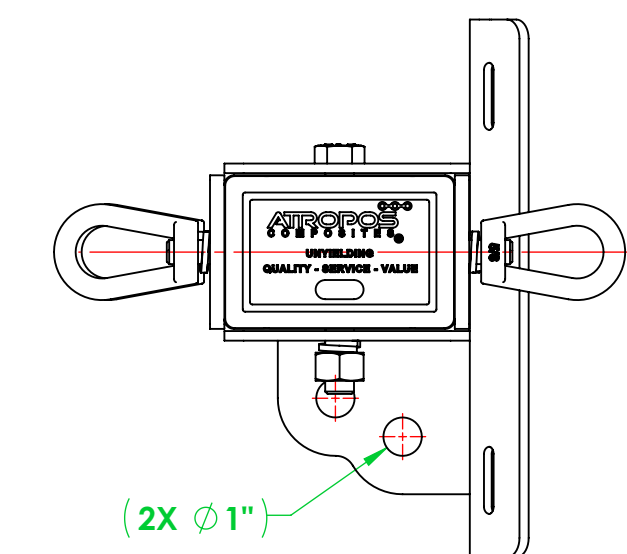

DETAIL A

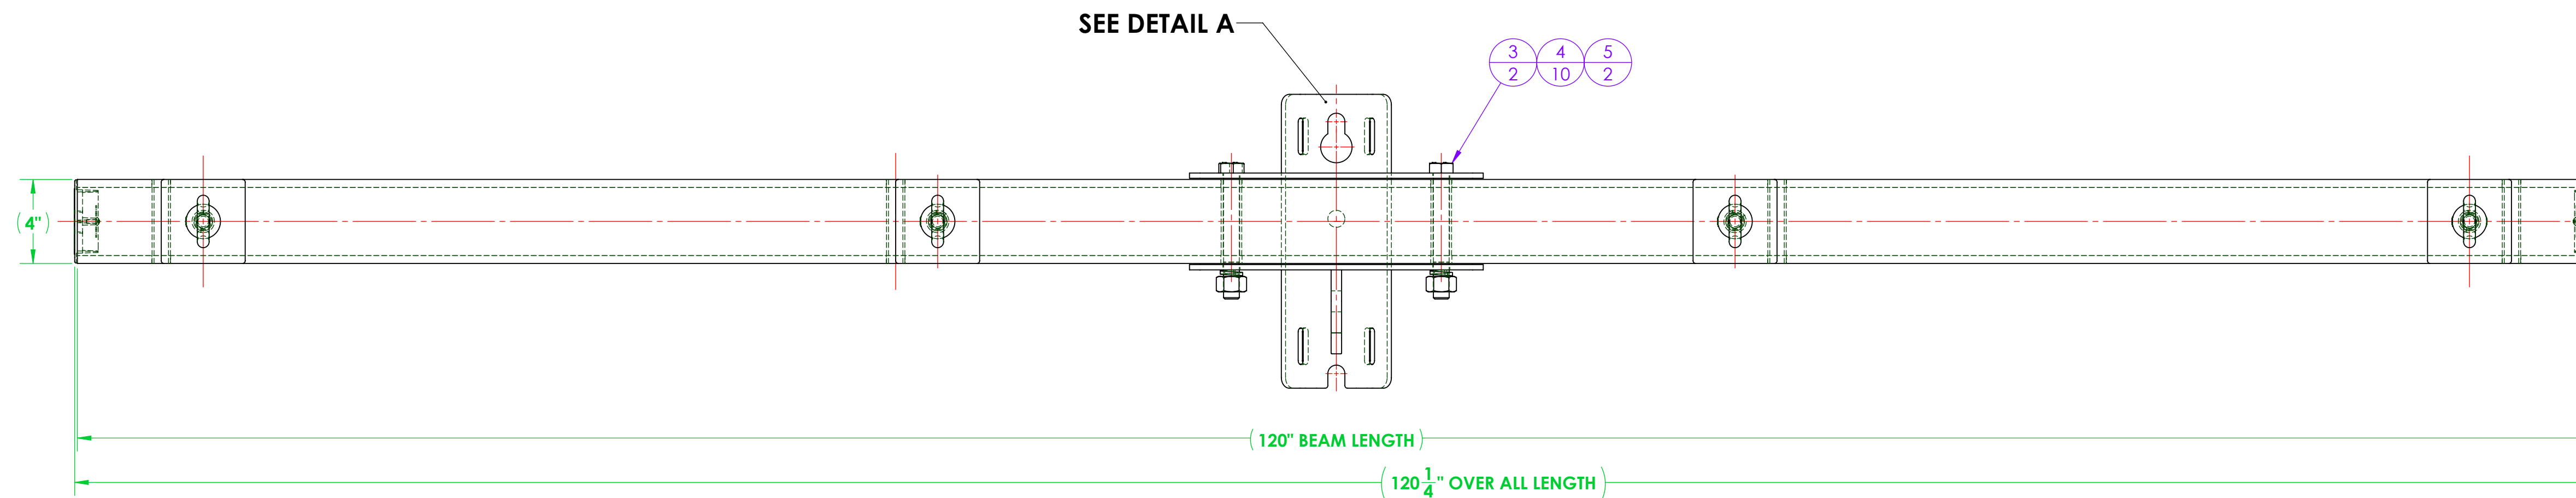

ITEM NO.	PART NUMBER	DESCRIPTION	QTY
1	A713-0133	WELDMENT, 5/8" HARDWARE MOUNTING BRACKET, CROSSARM, DEADEND, 4600 SERIES	1
2	4603A120-D312-4R10 CA	ASSEMBLY, 4602 DEADEND CROSSARM, 10'	1
3	A616-0020-02	BOLT, HEX, 3/4"-10 X 6.00" LONG, HOT DIPPED GALVANIZED STEEL, 1-1/8" DRIVE	2
4	A616-0042-02	LOCK WASHER, FOR 5/8" SCREW, 0.641" ID, 1.073" OD, 0.156" THICK, HOT-DIPPED GALVANIZED STEEL	10
5	A616-0019-02	EXTREME STRENGTH NUT, HEX, 3/4"-10, 2H, HOT-DIPPED GALVANIZED	2
6	A711-0011	WASHER, SQUARE, 4.00" X 4.00" X 0.375 THICK	8
7	A616-0017-02	EYENUT, 5/8"-11, GALVANIZED STEEL	8
8	A711-0016	ALL-THREAD, 5/8"-11 X 9.00" LONG, GALV. STEEL	4

GENERAL NOTES	UNLESS OTHERWISE SPECIFIED		NAME		DATE		 12208 MISSOURI BOTTOM ROAD, HAZELWOOD, MO 63042 PHONE: 314.472.1460 FAX: 314.495.1943 SALES@ATROPÓS-TECH.COM TITLE: ASSEMBLY, RUS, 4603 DEADEND CROSSARM WITH GAIN, 10' SIZE DWG. NO. D 4603A120-D312-4R10 SCALE: 1:8 WEIGHT: 134.49 REV - SHEET 1 OF			
	DIMENSIONS ARE IN INCHES		DRAWN		F. BRYANT				10/16/2025	
	STANDARD TOLERANCES		CHECKED							
	FRACTIONAL: ±1/32		ENG APPR.							
	ANGULAR: MACHINED: +0.5° BEND: -2°		MFG APPR.							
	TWO PLACE DECIMAL: +0.03		G.A.							
	THREE PLACE DECIMAL: +0.005									
	INTERFIT GEOMETRIC TOLERANCING PER: ANSI Y14.5									
	MATERIAL									
	+									
FINISH				PROPRIETARY AND CONFIDENTIAL						
-				THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VELTURS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF VELTURS IS PROHIBITED.						
DO NOT SCALE DRAWING										