

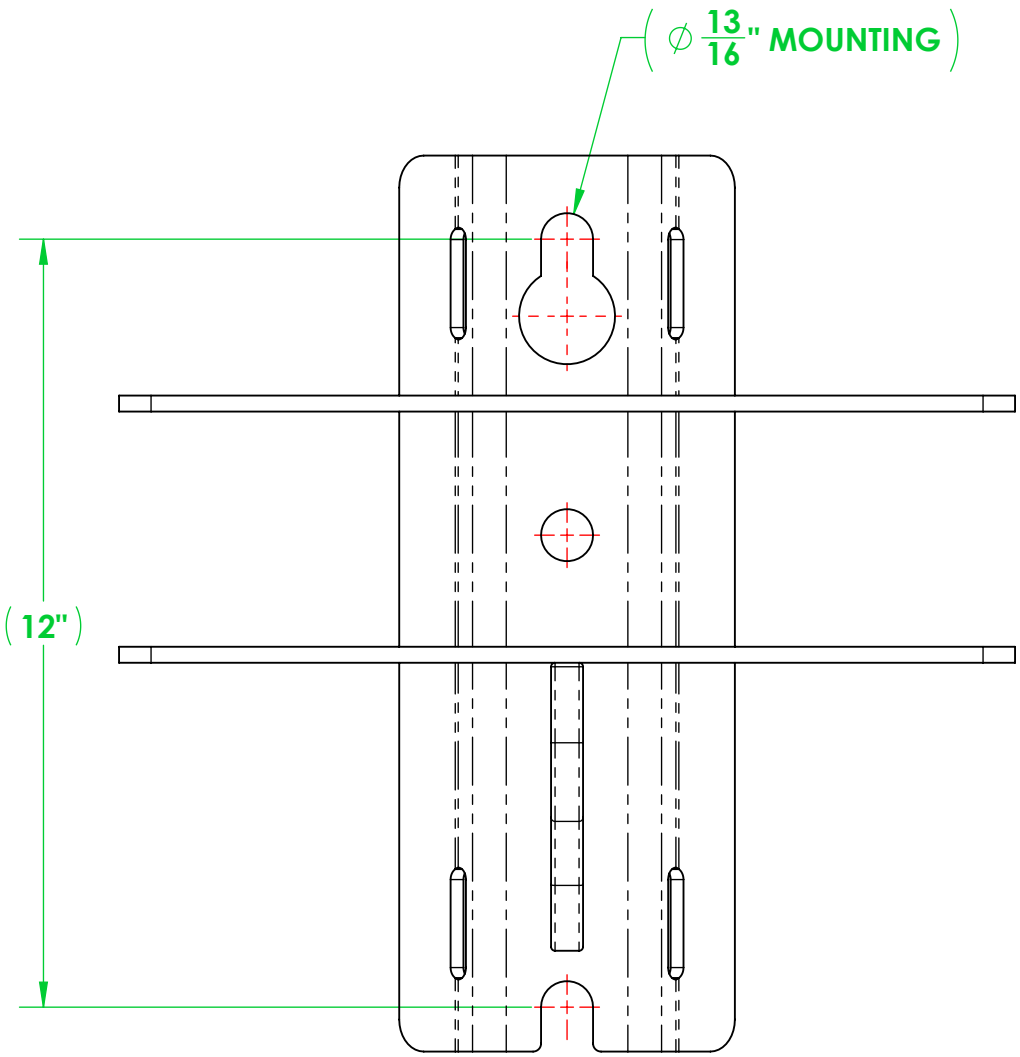
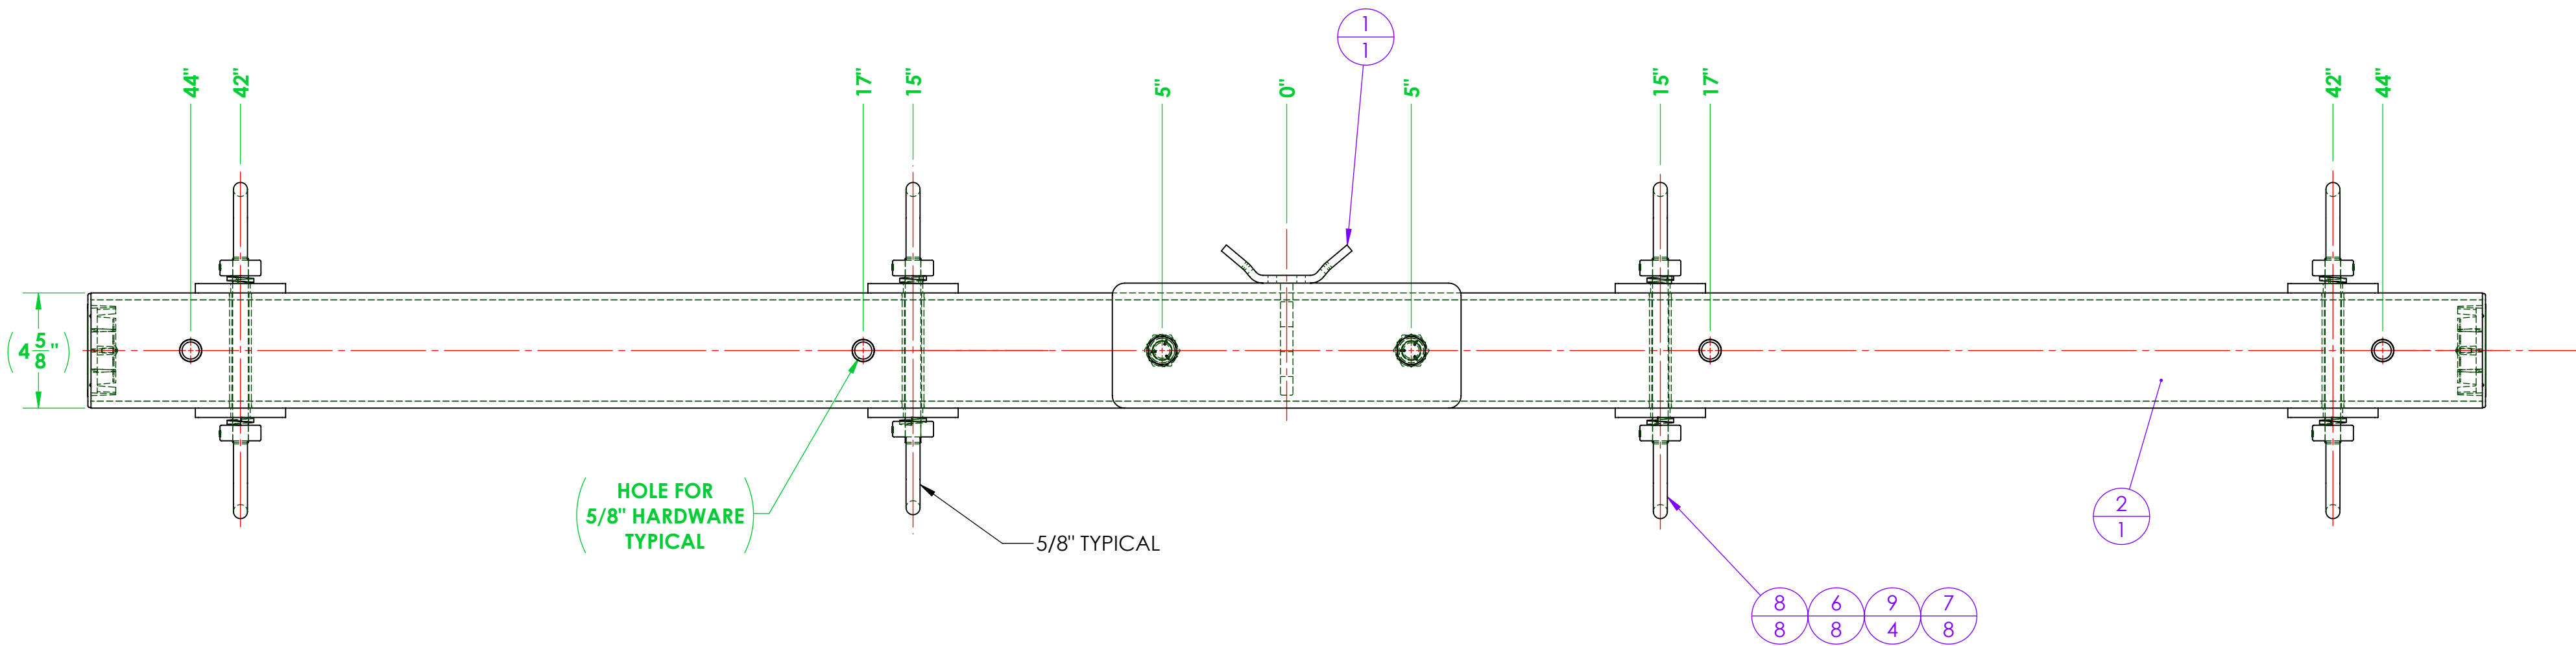


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
-		-	

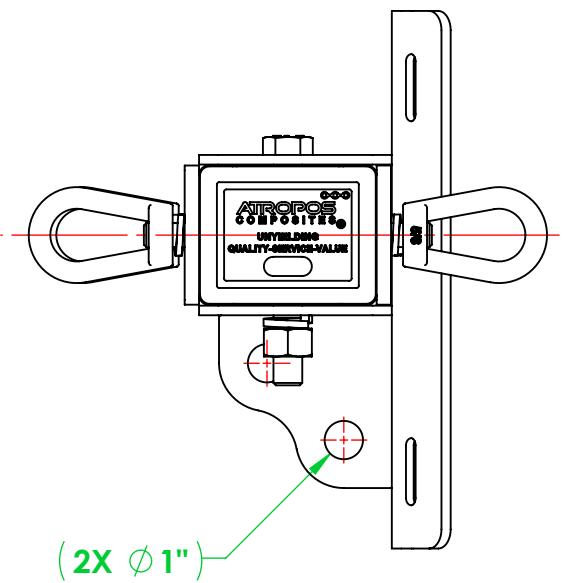

DETAIL A

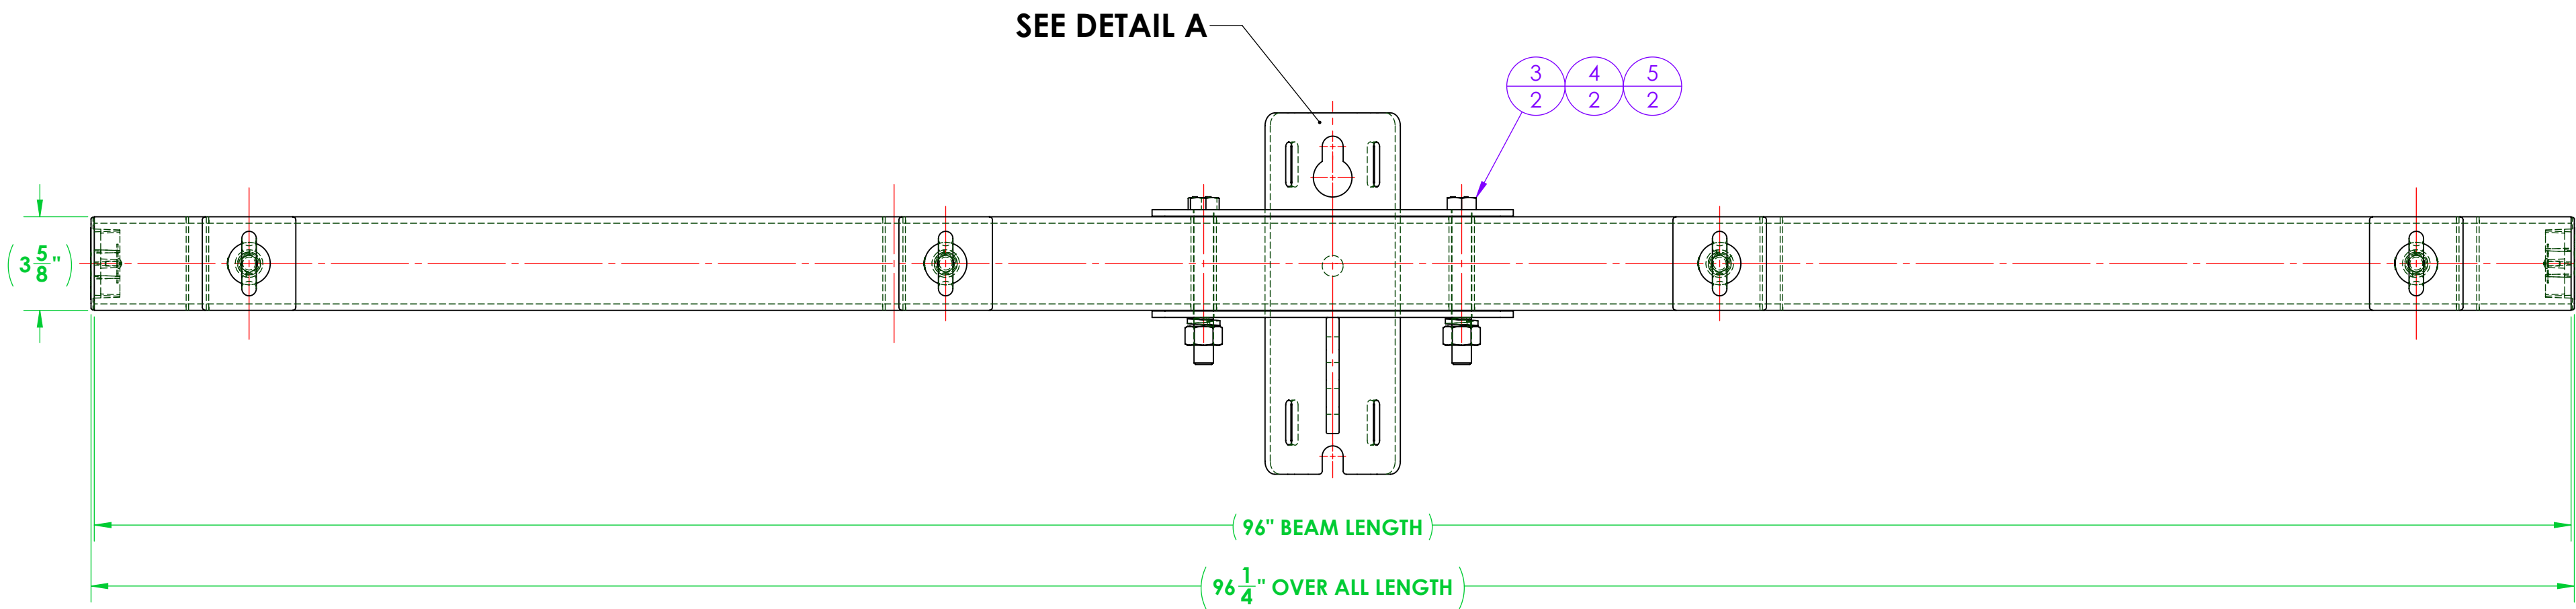

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	A713-0132	WELDMENT, 4.625" X 3.625" CROSSARM SUPPORT	1
2	3402A096-D312-4R08 CA	ASSEMBLY, 3402 DEADEND CROSSARM, 8'	1
3	A616-0020-02	BOLT, HEX, 3/4"-10 X 6.00" LONG, HOT DIPPED GALVANIZED STEEL, 1-1/8" DRIVE	2
4	A616-0042-01	LOCK WASHER, FOR 3/4" SCREW, 0.766" ID, 1.265" OD, 0.188" THICK, HOT-DIPPED GALVANIZED STEEL	2
5	A616-0019-02	EXTREME STRENGTH NUT, HEX, 3/4"-10, 2H, HOT-DIPPED GALVANIZED	2
6	A616-0042-02	LOCK WASHER, FOR 5/8" SCREW, 0.641" ID, 1.073" OD, 0.156" THICK, HOT-DIPPED GALVANIZED STEEL	8
7	A711-0014	WASHER, SQUARE, 3.625" X 3.625" X 0.375 THICK	8
8	A616-0017-02	EYENUT, 5/8"-11, GALVANIZED STEEL	8
9	A711-0044	ALL-THREAD, 5/8"-11 X 7.50" LONG, GALV. STEEL	4

GENERAL NOTES		UNLESS OTHERWISE SPECIFIED		NAME	DATE
DIMENSIONS ARE IN INCHES STANDARD TOLERANCES FRACTIONAL: 1/32 ANGULAR: MACHINED: ±0.5° BEND: ±2° TWO PLACE DECIMAL: ±0.03 THREE PLACE DECIMAL: ±0.005 INTERPRET GEOMETRIC TOLERANCING PER ANSI Y14.5 MATERIAL FINISH DO NOT SCALE DRAWING		DRAWN: F. BRYANT 10/16/2025		CHECKED:	
		ENG APPR:		MFG APPR:	
		Q.A.			
		PROPRIETARY AND CONFIDENTIAL			
		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VELTURS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF VELTURS IS PROHIBITED.			
TITLE:		SIZE DWG. NO.		REV	
ASSEMBLY, RUS, 3402 DEADEND CROSSARM WITH GAIN, 8'		D3402A096-D312-4R08		-	
SCALE: 1:8		WEIGHT: 82.95		SHEET 1 OF 1	



12208 MISSOURI BOTTOM ROAD, HAZELWOOD, MO 63042
PHONE: 314.714.4001 FAX: 314.873.1943
SALES@LABYRINTH-TECH.COM